


# Multi-Pure®

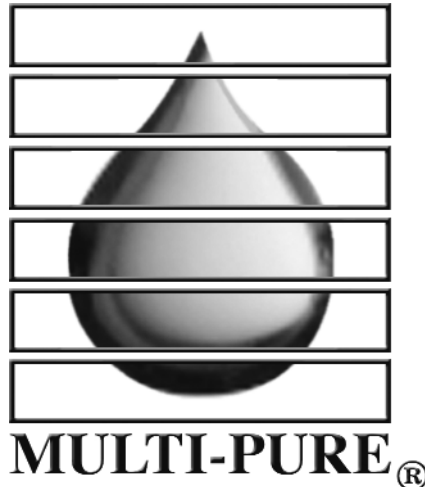

## **Multi-Pure Drinking Water Systems Below the Sink Models**

**For Model Nos. MP750SB, MP750SI, and MP1200EL**

# OWNER'S MANUAL

Please retain this manual for future reference.

Multi-Pure Corporation • P.O. Box 34630 • Las Vegas, NV 89133-4630 •  
Phone (702) 360-8880 • Toll-Free (800) 622-9206  
[www.multipure.com](http://www.multipure.com)

# Multi-Pure Drinking Water Systems

Thank you for selecting a Multi-Pure Drinking Water System to meet your need for quality drinking water. You have acquired one of the finest drinking water treatment devices available for the reduction of a wide array of contaminants. We are confident that your Multi-Pure System will make a difference in your life. Thank you for your business.

## Table of Contents

<b>I. General Information</b>	
A. Operation & Maintenance Specifications.....	3
B. Installation Overview and Part Numbers.....	4
C. Warranty.....	5
D. Required Tool List.....	5
<b>II. Installing the Faucet</b>	
A. Drilling the Hole.....	6
B. Stainless Steel Faucet.....	7
C. Stainless Steel Faucet with Capacity Monitor.....	8-9
<b>III. Connecting to your Plumbing.....</b>	<b>10-11</b>
<b>IV. Preparing the Housing</b>	
A. Installing the Filter.....	12
B. Attaching the Inlet / Outlet Adapters.....	12
<b>V. Connecting the Tubing to your Drinking Water System</b>	
A. Blue Faucet Tubing connection to the Outlet Port .....	13
B. Clear Tubing connection to the Inlet Port.....	13
C. Connecting to Ice-Maker, Instant Hot Dispenser or other device (optional) .....	14
<b>VI. Placing the Unit Under Your Sink.....</b>	<b>15</b>
<b>VII. Installing the Inline Model.....</b>	<b>15</b>
<b>VIII. Start-up and Use of Your Drinking Water System.....</b>	<b>16</b>
<b>IX. Filter Life.....</b>	<b>17</b>
<b>X. Product Registration.....</b>	<b>17</b>
<b>XI. Instructions for Changing Your Filter.....</b>	<b>18</b>
<b>XII. Performance Certification.....</b>	<b>19</b>
<b>XIII. Performance Data Sheet.....</b>	<b>20-22</b>
<b>XIV. California Certification.....</b>	<b>23</b>
<b>XV. Troubleshooting.....</b>	<b>24</b>
<b>XVI. Questions and Answers.....</b>	<b>25</b>

## I.A. Operation and Maintenance Specifications

	<b>MP750Series</b>
Model Numbers	MP750SB, MP750SI, MP1200EL *
Approximate Filter Capacity	750 gallons
Capacity with End-of-life Indicator	1200 gallons
Replacement Filter Type	CB6
Approximate Filter Cost	\$60.00 +
Approximate Flow Rate @ 60 psi	0.75 gpm
Housing Composition	Stainless Steel
Rubber Items	Nitrile (NBR)
Outlet	1/4" tube x 1/8" Pipe
Inlet	3/8" tube x 1/8" Pipe
Maximum Working Pressure	100 psi/ 7.0 kg/cm <sup>2</sup>
Minimum Working Pressure	30 psi/ 2.1 kg/cm <sup>2</sup>
Maximum Operating Temperature	100° F/38°C - for cold water use only
Minimum Operating Temperature	32°F/0°C - for cold water use only
Particle Retention Size	sub micron (0.5 micron)
Certified by:	NSF
+ plus tax and shipping and handling	
* model comes with end-of-life indicator	


### NOTES

1. Replacement filters can be purchased directly from Multi-Pure Corporation. The replacement filter model number is CB6. The approximate retail price of the replacement filter is also shown above. Price excludes sales tax and shipping and handling fees (prices subject to change without notice).
2. Filter life will vary in proportion to the amount of water used and the level of impurities in the water being processed. Replace the filter cartridge when the first of the following occurs: (a) annually; (b) when the unit's rated capacity is reached; (c) the flow rate diminishes; (d) the filter becomes saturated with bad tastes and odors. The rated capacity of the filter cartridge is 750 gallons for Models MP750SB and MP750SI; capacity of the MP1200EL is 1200 gallons.
3. MP1200EL comes with a capacity monitor that automatically flashes a yellow light when it is time to replace the filter.
4. Not intended to be used where the water is microbiologically unsafe or with water of unknown quality without adequate disinfection before or after the unit. Systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts.
5. Do not allow water to freeze in the unit. If unit is exposed to freezing temperatures, drain water from unit and remove filter.
6. Do not allow water to sit in unit for extended periods of time (10 or more days) without being used. If unit is to be left unused for more than 10 days, drain all water from the system and remove the filter. Upon your return, reconnect the filter in the housing and continue use. In the event water does sit in the unit for 10 or more days, the system should be flushed by allowing water to flow to waste for about 3 minutes; then continue use as normal.
7. To dispose of the used filter, remove it from the housing and place the old filter in your normal refuse. The filter disposed of in a normal landfill will not release any chemical contamination but will probably continue to adsorb additional contaminants that are disposed of in landfills.
8. Check for compliance with state and local laws and regulations.

# I.B. MP 750SB Installation Overview & Part Numbers

Item #	Part #	Part Description	Item #	Part #	Part Description
1	MC650	Faucet assembly with blue tubing attached	6	MC253BS	V-band with knob
2	MC232	Clear tubing -connects inlet adapter to plumbing	7	CB6	Carbon Block Filter
3	MC720	Small Outlet adapter - connects to blue tubing attached to faucet	8	MC351	O-ring
4	MC730	Large Inlet adapter - connects to clear tubing	9	MCB750	Housing bottom
5	MCL500	Housing top	10	MC930ASBL	Adapta Valve assembly
			11	MC722	Tubing adapter
			12	MC252	Black Rubber Cushion (inside housing top)
			13	MC780	Wing nut
			14	MC126	Bracket (not shown)

## Connect clear tubing to plumbing -- Option A or B

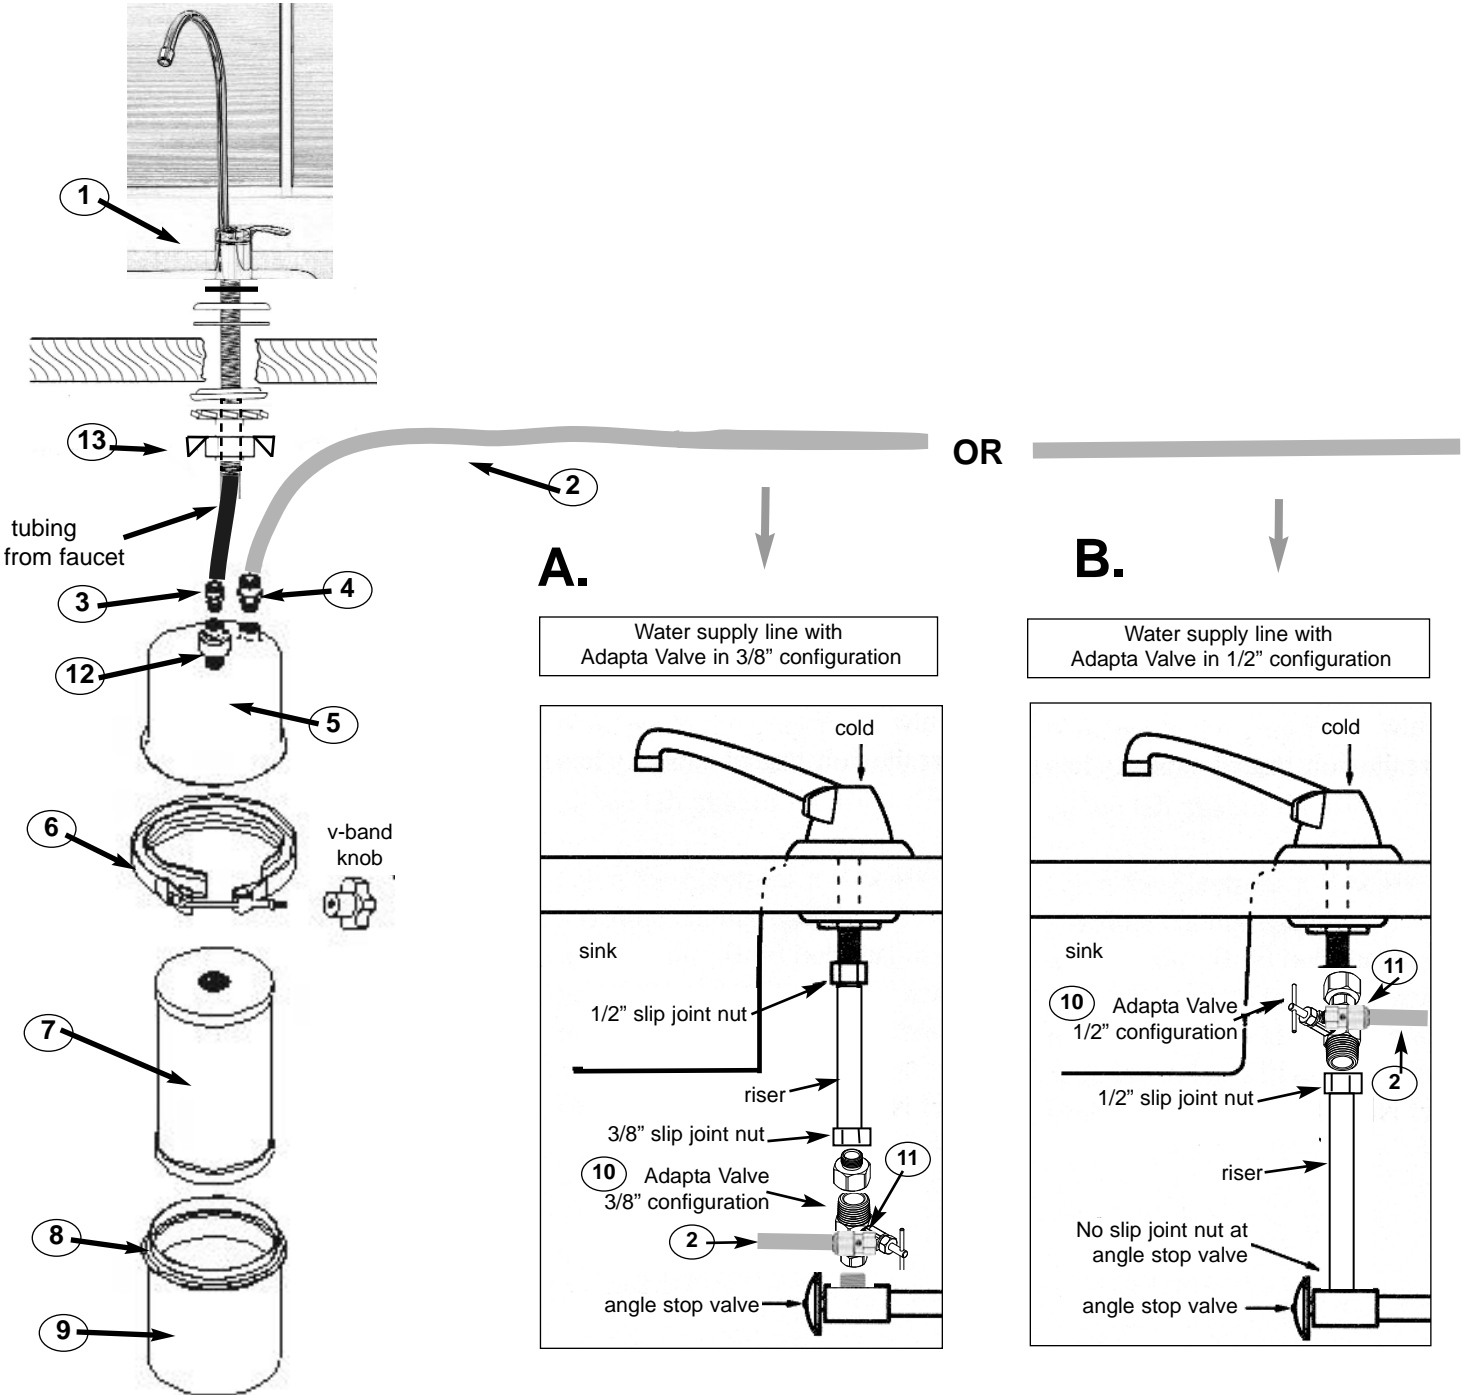

## I.C. Warranty

**Multi-Pure 90-Day Guarantee:** Multi-Pure demonstrates its confidence in the performance of its Drinking Water Systems by offering its 90 day money-back guarantee. If you should find the Drinking Water System unsatisfactory, let us know within 90 days of purchase, and we will promptly exchange it or refund your money.

**Multi-Pure Warranty:** Multi-Pure Corporation warrants to the original retail customer its Drinking Water Systems and components to be free of defects in material and workmanship for use under normal care, and will repair or replace any System at no charge (excluding transportation to Multi-Pure headquarters) to the customer during the warranty period. The Drinking Water System housings are warranted for a lifetime (provided that filter has been changed at least once per year); all exterior hoses and attachments to the System are also warranted for defects in material and workmanship for one year.

Multi-Pure Solid Carbon Block Filters are warranted for defects in material and workmanship for use under normal care. The capacity of the filter cartridge depends upon the amount of impurities in the water to be processed. For optimum performance, it is essential that the Solid Carbon Block Filter cartridge be replaced annually or when it has processed its listed capacity, whichever comes first.

Except as otherwise expressly provided above, Multi-Pure Corporation makes no warranties, express or implied, arising by law or otherwise, including without limitation the implied warranties of merchantability and fitness for a particular purpose, to any person. This limited warranty may not be altered, varied or extended except by a written instrument executed by Multi-Pure Corporation. The remedy of repair or replacement as provided under this limited warranty is exclusive. In no event shall Multi-Pure Corporation be liable for any consequential or incidental damages to any person whether occasioned by negligence of the manufacturer, including without limitation damages of loss of use, cost of substitution, property damage, or other monetary loss.

## I.D. Below the Sink Installations

The Models MP750SB, MP750SI, and MP1200EL Drinking Water Systems are designed for use below the sink and can easily be installed on the incoming cold water line. The MP750SB and MP1200EL units are connected to a specially designed stainless steel faucet (spigot) which installs directly on your sink, requiring little space. Your below sink unit is shipped with only one installation kit consisting of the accessories and fittings deemed appropriate for your area. Alternate accessories may be purchased at a minimal cost.

The Multi-Pure Model **MP750SI** includes the housing, filter, and adapters; no installation fixtures or accessories are provided. MP750SI is appropriate for an in-line installation and can be used with your existing faucet. It is recommended that the inline model be installed by a professional plumber in accordance with established plumbing procedures.

### Required Tool List

The following tools are required to install your below sink Multi-Pure Drinking Water System:

#### Installation of Faucet/Spigot (Ceramic/Porcelain Sink):

- 3/8" Reversible Electric Drill
- 7/16" (or 1/2") high speed steel drill bit
- 1/2" carbide tipped masonry drill bit
- Hammer
- Center punch
- 8" adjustable wrench
- Pliers or Vise Grips

#### Installation of Faucet/Spigot (Stainless Steel Sink):

- all of the above (except masonry drill bit), plus.....
- 1/8" high speed drill bit

#### Adapta Valve Installation:

- 8" adjustable wrench
- Wire Cutter or Knife

#### Installation of MP1200EL Capacity Monitor:

- (see tool list in Section II.C)



Model MP750SB

## II. Installing the Faucet

Multi-Pure's stainless steel faucet can be installed through a standard sink hole, if one is available. If you have a hole for a side spray hose on your sink, that hole may be used for your drinking water faucet, eliminating the need to drill a hole for the faucet.

The following instructions are for installing at your sink the special drinking water faucet included with your below sink model. Determine the type of faucet included with your unit and review the instructions for installing your type of faucet.

**Stainless Steel Faucet:** For instructions on installing the Stainless Steel Faucet with tubing attached that was shipped with Model MP750SB, see Section II.B.

**Stainless Steel Faucet with Capacity Monitor:** For instructions on installing the MP1200EL Faucet and Capacity Monitor, see Section II.C.





### II.A. Drilling the Hole

#### 1. Porcelain Sink, Ceramic Sink, or Cast Acrylic Sink

**Note: Porcelain, cast acrylic, and ceramic sink surface materials are extremely hard and can crack or chip quite easily. Use extreme caution when drilling. Multi-Pure Drinking Water Systems accepts no responsibility for consequential damage resulting from the installation of a faucet.**


1. Select and mark the spot for mounting the faucet on your sink top.
  - a. Confirm that there are no reinforcing ribs under the sink location you select for your faucet.
  - b. If you have an extra hole in your sink for a rinsing hose, you may want to disconnect that hose and use the existing hole for your drinking water faucet.
2. Using the hammer and center punch, make an indentation by tapping the center punch gently on the ceramic/porcelain where the hole is to be drilled.
3. Use the 1/2" carbide tipped masonry drill bit to grind away the porcelain down to the metal, clearing away enough porcelain to allow for drilling a hole without damaging the porcelain surface.
4. Carefully use the 7/16" ( or 1/2") high speed steel drill bit (CAUTION: do not allow the 7/16" bit to "grab" the porcelain - this would damage the porcelain surface) to completely drill a hole through the metal sink.



#### 2. Stainless Steel or Metal Sink


You will need to use a 1/8" high speed drill bit in addition to the other tools listed for the installation of a faucet on a stainless steel sink.

1. Select and mark the spot for mounting the faucet on your sink. If you have an extra hole for a spray hose at your sink, you may want to disconnect that hose and use the existing hole for your drinking water faucet.
2. Using the hammer and center punch, make an indentation where the hole is to be drilled.
3. Use the 1/8" high speed steel drill bit to drill a pilot hole.
4. Use the 7/16" (or 1/2") high speed steel drill bit to completely drill a hole through the stainless steel sink.

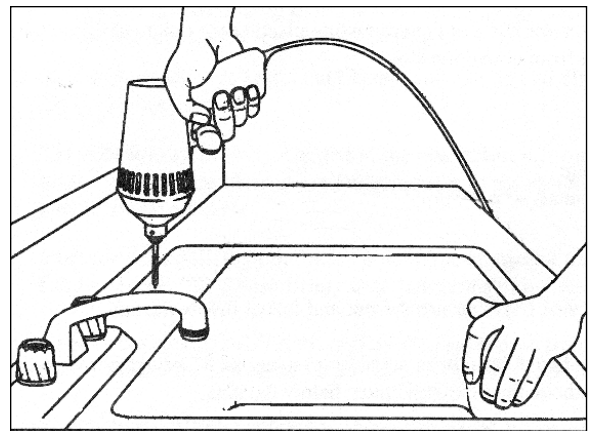


**Note: For drilling a hole in your countertop, please consult with the countertop manufacturer.**

## II.B. Installing the Stainless Steel Faucet

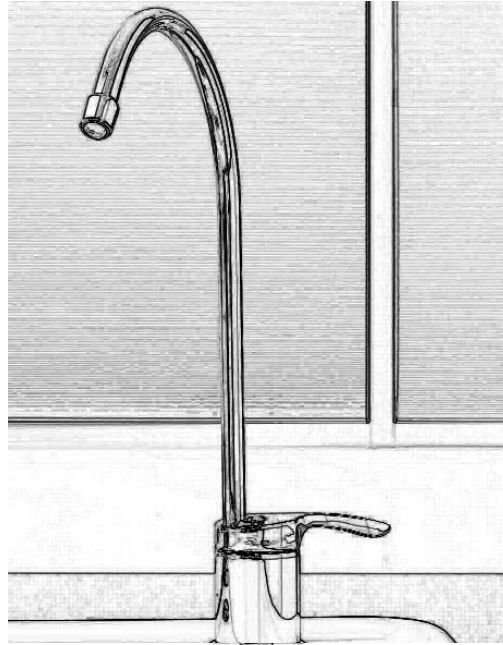

Complete Faucet Assembly  
with Blue Tubing  
MC650

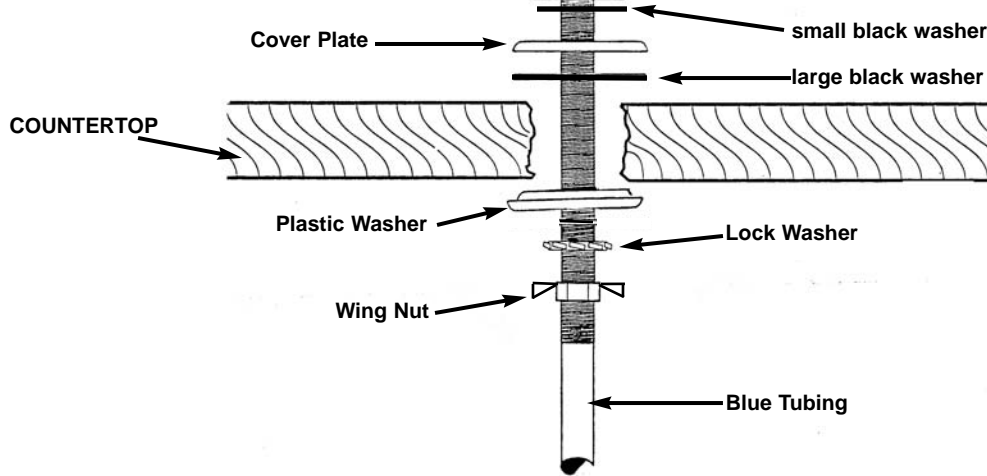

### Mounting the Faucet

1. Note that the blue tubing is attached to the faucet.
2. **From the sink / counter top**, place over the faucet hole:
  - a. The larger soft black rubber washer
  - b. The cover plate
  - c. The smaller soft black rubber washer
3. **From under the sink**, slide over the blue tubing:
  - a. the black plastic (hard) washer (with the small side up)
  - b. lock washer
  - c. the wing nut
4. Hand tighten the wing nut to secure the faucet. Using vice grips, secure the wing nut and faucet below the sink.
5. From above the sink, (CAUTION: protect the faucet base from scratching) using an 8" adjustable wrench, turn the faucet base clockwise until firm. Then remove the vise grips from below the sink.




**To operate your Multi-Pure faucet**, just turn the handle on for continuous flow. To stop flow, return the handle to its original position.

**The faucet is now ready to be connected to your drinking water unit.  
See Section V.A.**

## II.C. Installing the Faucet with a Capacity Monitor

Your Multi-Pure Drinking Water System is equipped with a DigiFlow 5100V Capacity Monitor that flashes red when the filter should be changed. Models with capacity monitors are equipped with a chrome-plated designer faucet with the tubing attached. In addition you will receive the DigiFlow 5100V Capacity Monitor (consists of two pieces), two adapters, and additional tubing (see diagram and parts list below). Not included but required for installation are two AAA batteries.

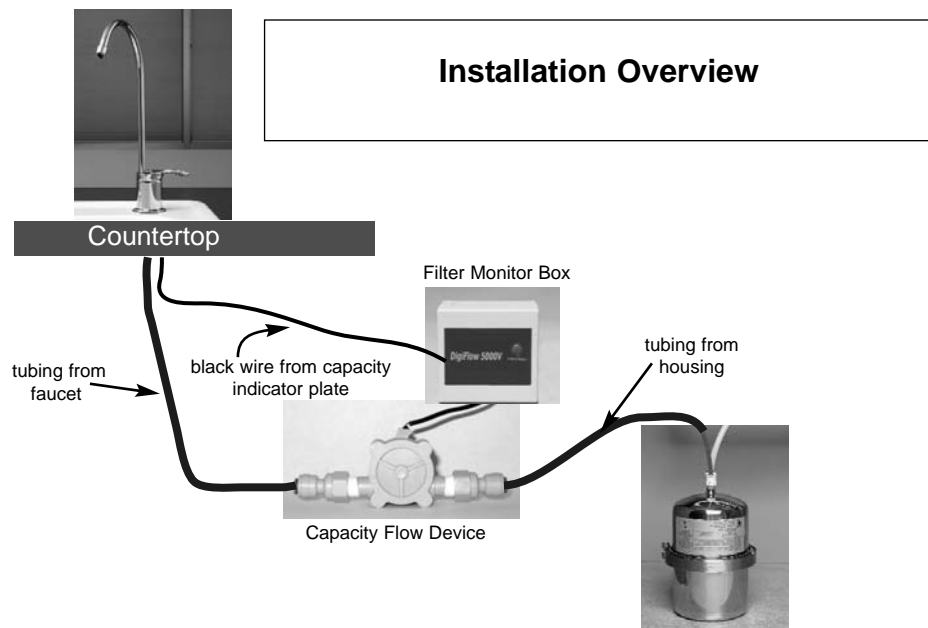


### Faucets with Capacity Monitor include:

- 1 spout
- 2 faucet handle
- 3 faucet base
- 4 faucet stud
- 5 tubing (blue) attached to faucet
- 6 smaller rubber washer
- 7 capacity indicator plate (black)
- 8 black wire (attached to #7)
- 9 larger rubber washer
- 10 hard black washer with side cut
- 11 track washer
- 12 lock washer
- 13 wing nut
- 14 capacity flow device
- 15 filter monitor box
- 16 adapters (MC745), two
- 17 tubing from capacity flow device to housing outlet

### Mounting the Faucet with a Capacity Monitor:

1. Follow the preceding instructions for drilling the hole; however, use the 1/2" drill bit all the way through the sink instead of the 7/16" drill bit to allow room to feed the faucet stud and the monitor cable down through the hole in the sink.
2. Note that the blue tubing is attached to the faucet.
3. **From the sink / countertop**, place over the faucet hole:
  - a. The larger soft black rubber washer (#9).
  - b. Then the Capacity Indicator Plate (#7); feed the attached black cable (#8) through the hole in the sink / counter. Position the Capacity Indicator Plate so that the indicator light will be easy to see.
  - c. Place the smaller soft black rubber washer (#6) over the Capacity Indicator Plate.
  - d. Place the faucet base (#3) on the soft washer and Capacity Indicator Plate, feeding the faucet stud and blue tubing down through the hole in the sink / counter. The faucet stud will now be accessible from below the sink.
4. **From under the sink**, do the following:
  - a. Slide the black plastic hard washer (#10) (with the small side up) over the blue tubing (#5), black wire (#6) and faucet stud (#4).
  - b. Slide the black "track" washer (#11) over the threaded faucet stud with the flat side down. Guide the black wire (#8) through the "track" to assure that the wire will be protected in the track and not be pinched between the sink /counter and the stud nut.
  - c. Slide the lock washer (#12) on the faucet stud.
  - d. Screw on the stud wing nut (#13), hand-tightening it just enough to keep the faucet secure on the sink top.

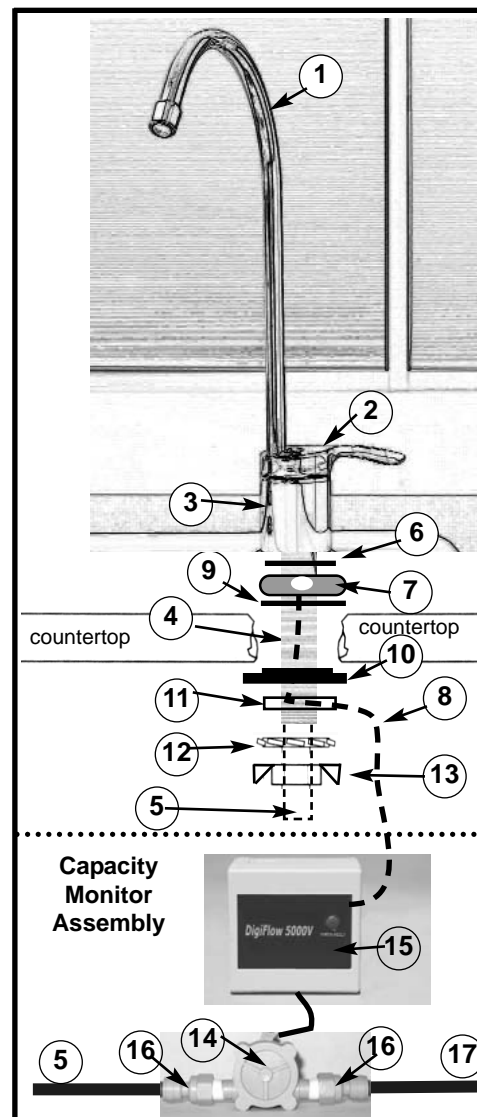




## II.C. Installing Faucet with Capacity Monitor (continued)

### Installation of the Capacity Monitor

#### 1. Preparing the Filter Monitor Box (#15):

- Guide the black wire (# 7) from under the sink to the Filter Monitor Box (#15) and connect the two plugs.
- Open the Filter Monitor Box and pull out the battery holder. Then insert two AAA batteries (not included), matching polarity shown on the battery holder. Press the check/reset button for six seconds. There will be a long audio sound, and the LED on the Capacity Indicator Plate will flash red and then green several times.
- Snap the cover back onto the Filter Monitor Box.
- Peel off the paper backing from the Velcro® and attach one piece to the back of the Filter Monitor Box. Select a clean, convenient location to mount the Box on your cabinet wall under the sink, allowing sufficient space for placement of the capacity flow device (#14) which is attached by a wire to the Filter Monitor Box. Press the second piece of Velcro® to the cabinet wall and press the Box onto the wall. .

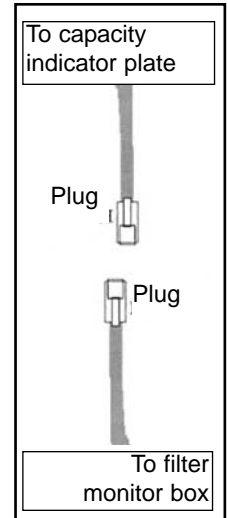

#### 2. Preparing the Capacity Flow Device (#14):

- Attach the two adapters (#16) to the capacity flow device (#14) -- one on each side.
- Complete the installation after connecting the tubing (see next step).

### Connecting the Tubing (See Section V.A for tips on connecting tubing)

#### Faucet Connection:

Connect the blue tubing attached to the faucet to the adapter (#16) on the OUTLET (faucet) (#5) side of the Capacity Flow Device (see the arrow on the Device for the direction of the water flow.)

- Using wire cutters or knife, cut (square cut) the tip end off of the blue plastic tube connected to the faucet. Do not use scissors.
- The tubing must be fully inserted in the adapter. It is recommended that you measure and mark the end of the tubing that you are inserting in the adapter to assure that it is inserted as far as it will go. The 1/4" blue tubing should be inserted about 5/8".

Insert blue tubing 5/8"

- Push the tubing through the small hole in the adapter until you feel resistance; at this point, the tubing is not fully inserted. Then push firmly until the tubing is inserted as far as it will go (see Item 2 above for measurement).


#### Housing Connection:

**NOTE: A separate piece of blue tubing is included with your shipment. Attach this separate piece of tubing between the housing OUTLET port and the Capacity Flow Device INLET port. Read this section first and then complete the installation of your drinking water system (See Section V.A and V.B).**

When you have completed the installation of your drinking water system below your sink, then connect the separate piece of blue tubing (#17) to the small straight adapter that you previously attached to the OUTLET port of the housing and then to the adapter on the INLET side of the Capacity Flow Device.


- Using wire cutters or knife, cut (square cut) the tips off of both ends of the plastic tube to be connected between the housing OUTLET port and the Capacity Flow Device INLET port. Do not use scissors.
- The tubing must be fully inserted in the adapters. It is recommended that you measure and mark the end of the tubing that you are inserting in the adapter to assure that it is inserted as far as it will go. The 1/4" tubing should be inserted about 5/8".
- Push the tubing through the small hole in the adapters until you feel resistance; at this point, the tubing is not fully inserted. Then push firmly until the tubing is inserted as far as it will go (see Item b above for measurement).

#### Capacity Flow Device Assembly

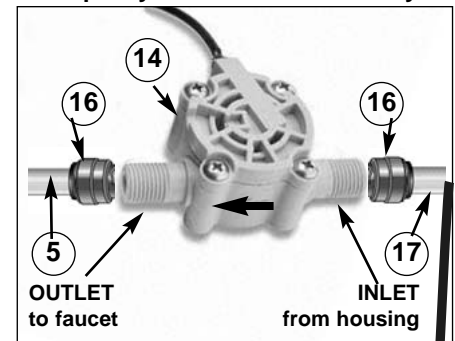

Pull to check that the tubing is secure.


Insert tubing and push until you feel resistance -- at this point, the tubing is not fully inserted. Push firmly until the tubing is inserted as far as it will go.

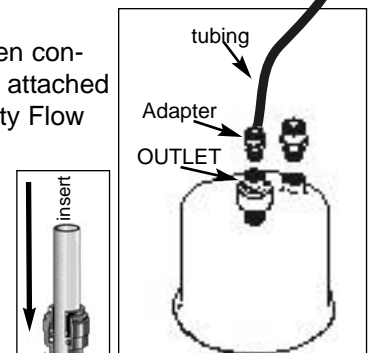

## II.C. Installing Faucet with Capacity Monitor (continued)

### Operation and Maintenance of Models with Capacity Monitor:

Multi-Pure Drinking Water Systems that are equipped with a capacity monitor let you know when the filter should be changed. When you turn on your Multi-Pure drinking water faucet, and water flows through the capacity monitor, the **green light** on the capacity indicator plate flashes several times to let you know that the System has not reached its certified capacity. The number of green flashes will decrease as the capacity of your monitor is used. When it flashes just two times, only 20% of your capacity remains; one time indicates only 10% of the capacity remains. It is recommended that you order a replacement filter when you reach the 20% capacity level.



A **red light** will flash alerting you that the capacity of your filter has been fully used and that you should immediately replace the filter. You also will hear an audio alert (buzzer).

As with all drinking water treatment devices which reduce certain contaminants by mechanical filtration, the capacity of the filter will vary and is dependent upon type and level of contaminants in your water. It is recommended that a prefilter be installed in front of models with a capacity monitor when used on water with high levels of particulate matter.

It is recommended that you replace the filter cartridge when the first of the following occurs: a) annually; b) the red light flashes on the capacity indicator plate, indicating that the unit's rated capacity has been reached; c) the flow rate diminishes; or d) the filter becomes saturated with bad tastes and odors.

## III. CONNECTING TO YOUR PLUMBING


**NOTE:** The type of plumbing in your home will determine how you install your Drinking Water System using the Adapta Valve. Included with your Drinking Water System is one installation kit, which includes all of the fixtures and accessories to install your Multi-Pure unit below the sink. **If you determine that you need fixtures different from those included with your shipment, please contact Multi-Pure's Customer Relations office at 800-622-9206, extension 175.**

### Adapta Valve Installation

If your residence has a cold water **supply line with a 3/8" or 1/2" slip joint connection**, you may use the **Adapta Valve** (shipped with your unit) to connect your Drinking Water System to the plumbing. The Adapta Valve assembly (MC930ASBL) includes:

- Adapta Valve (with shut-off valve attached)
- Tubing Adapter (MC722)




Adapta Valve  
(#10)



Tubing adapter  
(#11)



**NOTE:** When attaching the Adapta Valve to straight pipe threads, use Teflon tape on the threads. Wrap the tape around the pipe only once.

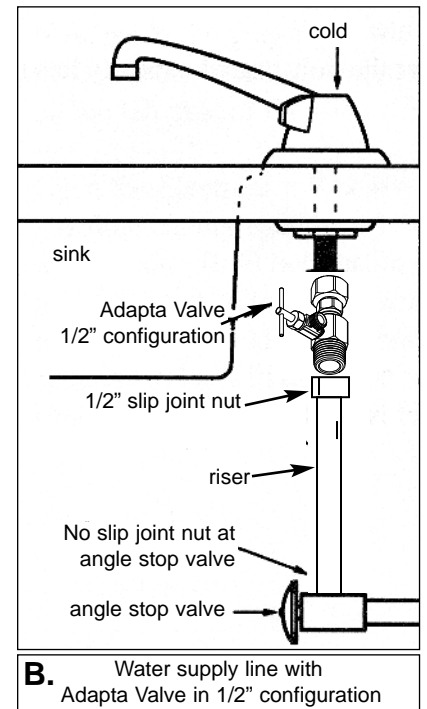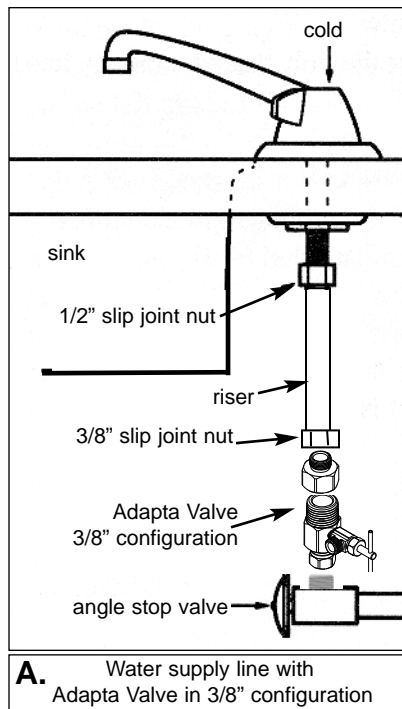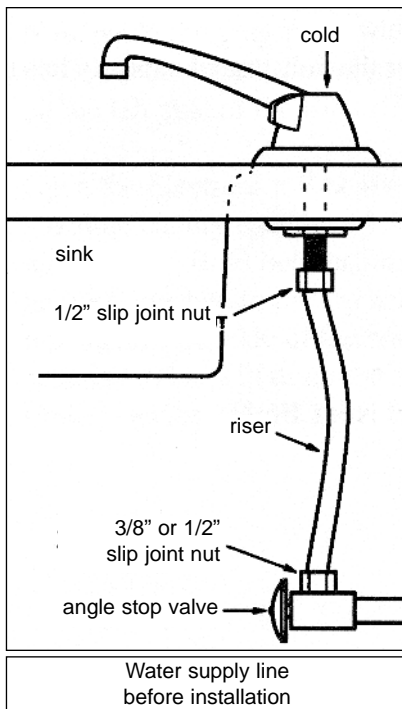


## Adapta Valve Installation (continued)

Choose the configuration (3/8" or 1/2") that fits your plumbing. The 3/8" configuration usually is installed at the bottom of the riser at the angle stop valve. The 1/2" configuration can be installed at the top of the riser at the faucet pipe or at the bottom of the riser at the angle stop valve.


A. Use the 3/8" configuration on a water supply line with a 3/8" slip joint.


B. Install with the 1/2" configuration at the top of the riser on a water supply line that does not have a slip joint nut at the angle stop valve. If there is a 1/2" slip joint nut at the angle stop valve, the adapta valve in the 1/2" configuration can be installed at the angle stop valve.

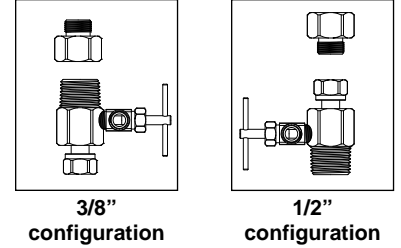

Install on the cold water line only:


1. Turn off the cold water supply to the faucet by turning the angle stop valve completely off. You should have on hand a container to catch any residual water in the pipes.
2. Disconnect the cold water riser/supply line at the angle stop valve (or at your cold water faucet pipe, depending on the plumbing in your home) by turning the slip joint nut counter clockwise, using an 8" adjustable wrench.
3. Using the 8" adjustable wrench, connect to the Adapta Valve to the pipe (angle stop valve or your cold water faucet pipe) from which you removed the slip joint nut. Be sure the rubber washer is in place in the Adapta Valve. Turn clockwise until tight; however, DO NOT OVERTIGHTEN.
4. Connect the plumbing riser/supply line with the slip joint nut to the Adapta Valve. Be sure the supply line does not block the shut-off valve on the side of the Adapta Valve. If necessary, trim the supply line reconnecting. Turn clockwise until tight.
5. Attach the Tubing adapter (MC722) to the shut-off valve on the side of the Adapta Valve by turning clockwise. First use Teflon tape on the threads of the shut-off valve.
6. Connect the clear 3/8" clear plastic tubing (#2), shipped with the unit, to the Adapta Valve by inserting the tubing, as far as it will go, through the small hole in the Tubing adapter that you attached to the shut-off valve.
  - a. Cut (square cut) the tip ends off the tubing using a sharp knife. Do not use scissors.
  - b. The tubing must be fully inserted in the opening of the shut-off valve. It is recommended that you measure and mark the end of the tubing. The 3/8" clear tubing should be inserted about 7/8".



  
Insert clear tubing 7/8"

- c. Push the tubing through the small hole in the valve until you feel resistance -- at this point, the tubing is not fully inserted. Then push firmly until the tubing is inserted as far as it will go.

Push the tubing into the small hole as far as it will go. Pull to check secure.



7. Confirm that the Unit Shut-off Valve (attached to the Adapta Valve) is in the OFF position by turning the handle clockwise until it stops.
8. To connect the clear plastic tubing to your drinking water unit proceed to Section V.

## IV. PREPARING THE HOUSING


Multi-Pure's below sink Models are designed for use under your sink. Your Below Sink Unit is shipped with the adapta valve installation kit. **If you determine that you need fixtures different from those included with your shipment, please contact Multi-Pure's Customer Relations office at 800-622-9206, extension 175.**

Now that you have completed the faucet installation and connected to the plumbing, it is time to prepare the housing for completion of the installation.

### IV.A. Filter Cartridge Installation

The filter cartridge is shipped outside of the unit housing (in most cases) to protect your filter and drinking water system from damage during shipping. Be sure to insert the filter cartridge into the drinking water system housing before finalizing the installation. First, remove the plastic wrapper and instruction wrap from around the filter.

1. With the housing in an upright position, open the unit by unscrewing the black knob on the Locking V-Band. Spread it apart and remove the Locking V-Band.
2. Separate the unit, leaving the black o-ring in place on the housing bottom.
3. Screw the new filter (cartridge) in the housing top, turning the cartridge in the direction shown. Be sure that the filter has been screwed in **STRAIGHT**. **DO NOT OVERTIGHTEN.**
4. Reconnect the housing top with bottom and replace Locking V-Band; replace black knob and turn until tight. Be sure that the Locking V-Band is fastened tightly by:
  - a. Checking the V-Band to confirm that it is secured evenly around the housing top and bottom.
  - b. Hand-tightening the black knob on the V-Band until it is as tight as possible.

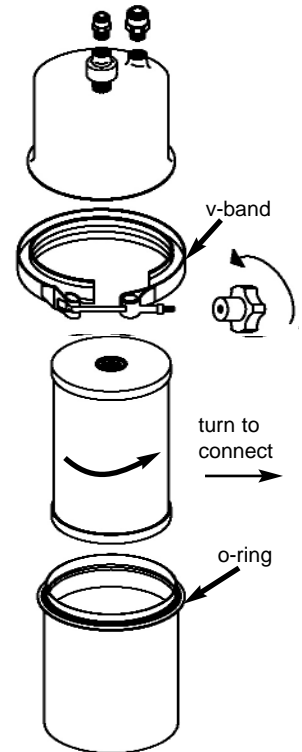



### IV.B. Attaching the Adapters to the Housing

Multi-Pure units are shipped with the connecting adapters appropriate for your Multi-Pure Drinking Water System. The following shows the adapters that are shipped with the various units. You will receive one INLET adapter and one OUTLET adapter. Now is the time to attach the adapters to the housing top.

**Blue Tubing** connects the drinking water faucet to the **OUTLET** port on the housing.

**Clear Tubing** connects the plumbing to the **INLET** port on the housing.

1. Connect the appropriate adapter to the OUTLET port on the housing by turning clockwise. Tighten by hand and then give one to two more turns with a wrench.
2. Connect the INLET adapter or shut-off valve to the INLET opening on the unit housing by turning clockwise. Tighten by hand and then give one to two extra turns with a wrench.

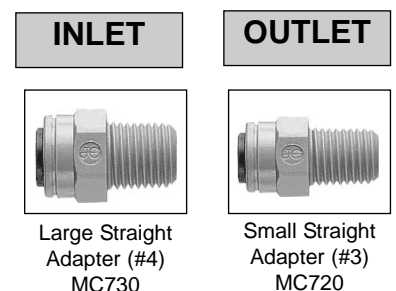

## V. Tubing Connections

**Note: Use wire cutters or sharp knife to cut tubing. Do not use scissors.**


Now that you have installed the faucet, connected to the plumbing, and prepared the housing, you are ready to complete the installation of your Drinking Water System.

Reference Section II for installing the faucet.

Reference Section III for connecting to the plumbing.

Reference Section IV.A for installing the filter.

Reference Section IV.B for connecting housing Inlet and Outlet adapters.

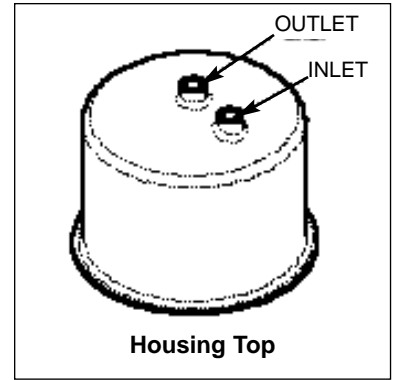


### V.A. Connecting the Blue Faucet Tubing to Outlet Port

1. Connect the blue faucet tubing to the Small Straight Adapter (#3) that you previously connected to the **OUTLET** port.
2. Using wire cutters or knife, cut (square cut) the tip end off of the blue plastic tube connected to the faucet. Do not use scissors.
3. The tubing must be fully inserted in the adapter / switch. It is recommended that you measure and mark the end of the tubing that you are inserting in the adapter to assure that it is inserted as far as it will go. The 1/4" blue tubing should be inserted about 5/8".

Insert blue tubing 5/8"

4. Push the tubing through the small hole in the adapter until you feel resistance; at this point, the tubing is not fully inserted. Then push firmly until the tubing is inserted as far as it will go (see Item 3 above for measurements).
5. Pull to check that the tubing is secure.

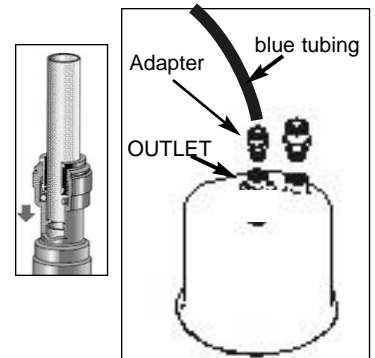


**Insert tubing and push until you feel resistance -- at this point, the tubing is not fully inserted. Push firmly until the tubing is inserted as far as it will go.**

### V.B. Connecting Clear Tubing to Inlet

**Note: Use wire cutters or sharp knife to cut tubing. Do not use scissors.**

**Be sure to provide sufficient tubing for conveniently changing the filter when it is time to replace it.**

1. Connect the clear 3/8" tubing to the Large Straight Adapter (#4-MC730) which you previously connected to the **INLET** port.
2. Using wire cutters or knife, cut (square cut) the tip ends off of the clear plastic tube which you previously connected to the plumbing. Do not use scissors.
3. The tubing must be fully inserted in the adapter / shut-off valve. It is recommended that you measure and mark the end of the tubing that you are inserting in the adapter / valve to assure that it is inserted as far as it will go. The 3/8" clear tubing should be inserted about 7/8".
4. Push the tubing through the small hole in the adapter or valve until you feel resistance; at this point, the tubing is not fully inserted. Then push firmly until the tubing is inserted as far as it will go (see Item 3 above for measurements).
5. Pull to check that the tubing is secure.

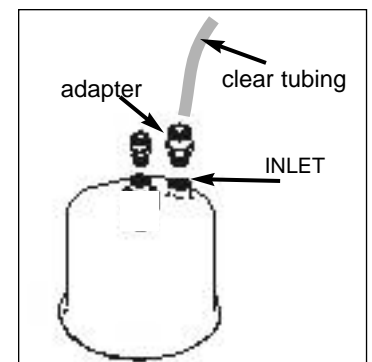

Connecting to Straight Adapter




**Insert tubing and push until you feel resistance -- at this point, the tubing is not fully inserted. Push firmly until the tubing is inserted as far as it will go.**

## V.C. Connecting to Ice-Maker, Instant Hot Dispenser, or other device with a TEE


In addition to using your Multi-Pure Drinking Water System to provide delicious, quality water at the sink, you may connect that same unit to your refrigerator, to an instant hot water dispenser, or to another device to provide clean, clear water for your ice-maker or hot beverages. To connect to your refrigerator, instant hot dispenser or device, attach to the OUTLET port a **TEE** (available through **Multi-Pure [Part No. MC445 - includes a Stem for MP750 units; MC760 for MP1200EL unit]** or at your local plumbing supplier). When using the TEE, the 1/4" straight adapter is eliminated.

To connect, follow these steps.

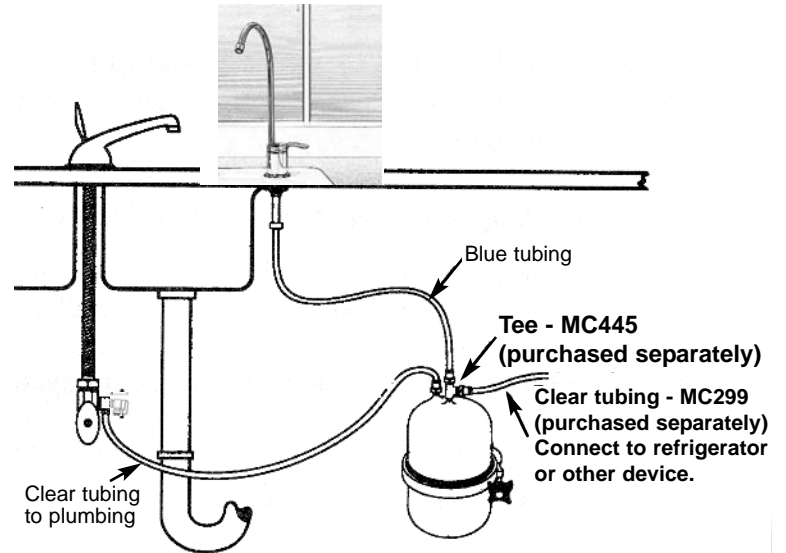


### Stainless Steel and Capacity Monitor Faucets

1. Determine whether you have access to your refrigerator or other device from your sink.
2. Attach a TEE to the OUTLET opening on the unit housing turning clockwise.
  - a. Connect the STEM (included with TEE) by turning clockwise. Tighten by hand and then give one to two extra turns with a wrench.
  - b. Insert the nipple on the stem into the small hole in the bottom of the Tee. Push the Tee until you feel resistance -- at this point, the stem is not fully inserted. Push firmly until the stem is inserted as far as it will go.
3. Connect the blue faucet tubing to the top port of the Tee. Push the tubing until you feel resistance -- at this point, the tubing is not fully inserted. Push firmly until the tubing is inserted as far as it will go. (See Section V for more information on connecting the tubing for stainless steel faucets; See Section II.C for capacity monitor faucets.)
4. Connect a separate 1/4" poly tube (available through Multi-Pure or a plumbing supplier) to the side port (A) of the Tee. Provide sufficient tubing to reach your refrigerator, instant hot dispenser, or other device and service unit and connect same to the Tee.

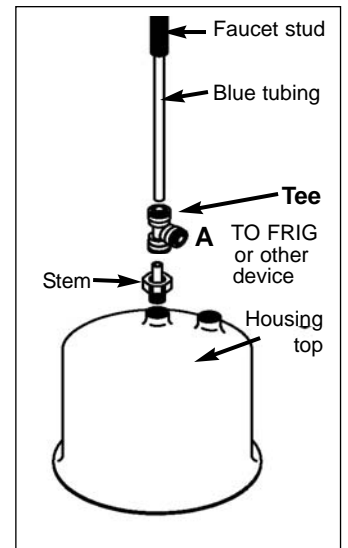

Unit with Stainless Steel Faucet

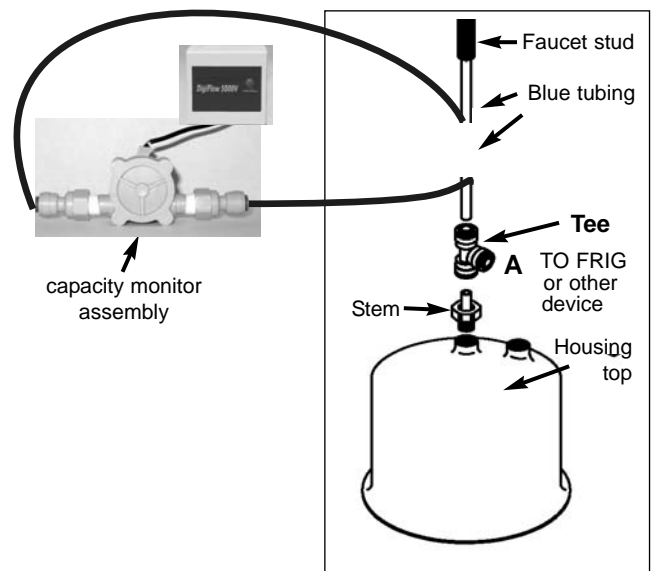

Unit with Capacity Monitor Faucet


## VI. Placing Your Unit Under Your Sink

Your MP750SB or MP1200EL Drinking Water System will sit on the cabinet floor. Be sure to provide sufficient tubing for conveniently changing the filter when it is time to replace it. You may also mount the unit on the cabinet wall by using the optional wall bracket (**please contact Multi-Pure's Customer Relations office at 800-622-9206, extension 175 if you need this bracket**).

### Mounting Your Unit to the Wall:

Should you choose to mount your unit on the interior cabinet wall (side wall) under your sink, be sure to provide sufficient tubing for conveniently changing the filter when it is time to replace it.

1. Fasten the bracket to the wall, making sure it is in an upright position (the two holes go on top).
2. Attach the unit to the bracket by tilting the top of the unit towards the wall and sliding the V-Band up and into the upper notch on the bracket.
3. Straighten the unit and let the bottom of the V-Band settle into the lower notch on the bracket.

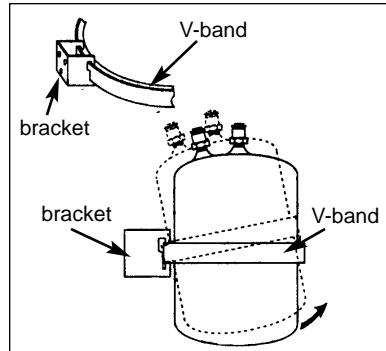

To remove your unit for servicing, reverse the above steps.

## VII. Installing Inline Model MP750SI

Multi-Pure Inline models are ideal for refrigerators, water coolers, or restaurants where all water to a cold water outlet or faucet is filtered. Model MP750SI includes the housing, filter, adapters, bracket, and screws. The inline models are appropriate for an in-line installation and can be used with your existing faucet. It is recommended that the inline models be installed by a professional plumber in accordance with established plumbing procedures.



MP750SI

## VIII. START-UP AND USE OF YOUR MULTI-PURE DRINKING WATER SYSTEM

**Congratulations, your Drinking Water System has been connected to your plumbing and you are now ready to start-up the unit, as follows:**

1. Using a paper towel or cloth, dry off all plumbing connections.
2. Also, dry off the drinking water unit.
3. Ensure that all connections are tight (CAUTION: DO NOT OVERTIGHTEN).
4. You are now ready to turn your water supply back on; turn on the plumbing Angle Stop Valve under your sink or the water shut-off valve where water enters your residence.
5. Turn on the water going to your drinking water system by turning the handle on the shut-off valve that you installed (see Section III).
6. Open the drinking water faucet by turning the handle on the faucet.
7. Allow water to run through the unit for about 5 minutes so that all air can escape.
8. Adjust the handle on the shut-off valve so that the water flow to the drinking water faucet does not exceed the flow rate (0.75 gpm; to measure flow rate - it takes approximately 20 seconds to fill a quart at 0.75 gallons per minute)
9. Close the drinking water faucet and check for leaks.
  - a. Check the V-band to confirm that it is secured evenly around the housing top and bottom.
  - b. Hand-tighten the black knob on the V-band until it is as tight as possible.
10. Allow water to run through the unit to waste for approximately 20 minutes to flush the filter of loose carbon fines.

Note: units with the capacity monitor please disconnect the monitor before flushing the filter. The carbon fines will clog the measuring device. Once you have flushed your filter, reconnect the monitor.
11. Shut off the water and check for leaks.



Your Drinking Water System is now ready for use. You can enjoy having great tasting, high quality water for drinking, cooking, beverages, food preparation, etc. whenever you want it.

**Congratulations, you have completed the installation.**

For optimum performance and to maintain the warranty on your Multi-Pure Drinking Water System, it is recommended that your filter be replaced on a regular basis. Filter life will vary depending on amount of water used and the type and level of contaminants in your local water.

**If you have any questions regarding the installation of your Multi-Pure Drinking Water System, call:**

**Multi-Pure Corporation  
Customer Relations Department  
7251 Cathedral Rock Drive  
Las Vegas, NV 89128  
(702) 360-8880 phone  
(800) 622-9206 toll-free  
(702) 360-8575 fax  
email: [custsvc@multipure.com](mailto:custsvc@multipure.com)  
[www.multipure.com](http://www.multipure.com)**





# XI. Instructions for Changing Your Filter

## INSTRUCTIONS - STAINLESS STEEL MODELS

1. Remove plastic wrapper and instruction wrap.
2. It may be advisable to place a pan beneath the housing before opening it.
3. Turn off water going to the drinking water system by turning the shut-off valve (See Fig. A) under your sink or turn off water at the water shut-off valve where water enters your residence.
4. Open drinking water faucet to relieve pressure.
5. Remove drinking water system (unit) from bracket (if mounted) by tilting the top of the unit towards the wall and slide locking V- band of unit up and into upper notch; slide unit out of bracket. (See Fig. B)
6. With the housing in an upright position, open the unit by unscrewing the black knob on the locking V-band, and spread it apart and remove the locking V-band. (See Fig. C)
7. Separate the unit, leaving the black o-ring in place.
8. Remove the old filter (cartridge) from the unit housing by turning the cartridge in the direction shown in Fig. D.
9. Wrap the used filter in paper and dispose of in your normal refuse.
10. Clean and rinse out the inside of the housing.
11. Inspect the black rubber cushion; it is recommended that the cushion be replaced every two to three years. To order a replacement part, request product code No. MC252 (See Fig. D). You should also inspect the o-ring and adapters to see if they need to be replaced.
12. Screw new filter (cartridge) in the housing top by turning the cartridge as shown in Fig. E until firm; however, DO NOT OVERTIGHTEN.
13. Reconnect the housing top with bottom and replace locking V-band; replace black knob and turn until tight.
14. Be sure that the locking V-band is fastened tightly by:
  - a. Check the V-band to confirm that it is secured evenly around the housing top and bottom.
  - b. Hand-tighten the black knob on the V-band until it is as tight as possible.
15. Turn on water going to the drinking water system (unit) and start the flow of water through the unit.
16. Allow water to run through the unit spout/faucet for about 5 minutes so that all air can escape.
17. Then turn off the water to the spout/faucet. A small quantity of water may flow from the housing spout/faucet for about 10 to 20 seconds after you shut off water.
18. Check all connections to confirm that there are no leaks.
19. Flush the filter of the carbon fines by allowing water to run to waste for about twenty (20) minutes. Note: units with the capacity monitor please disconnect the monitor before flushing the filter. The carbon fines will clog the measuring device. Once you have flushed your filter, reconnect the monitor.
20. Shut off the flow of water through the drinking water system. A small quantity of water may flow from the spout/faucet for about 10 to 20 seconds.
21. Check for leaks.

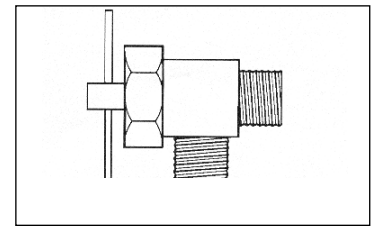


Fig. A

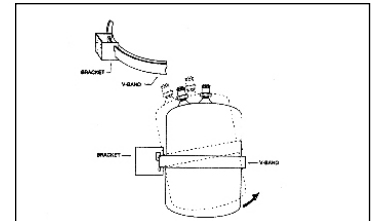


Fig. B

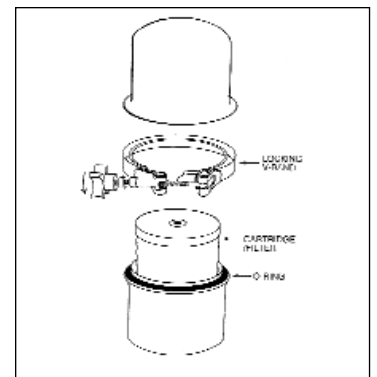


Fig. C

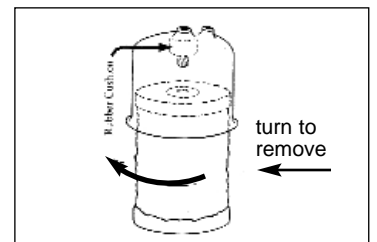


Fig. D

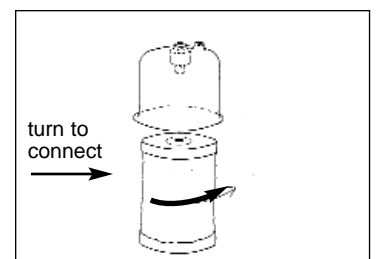


Fig. E

### Units with Capacity Monitor (End-of-Life Indicator- Model MP1200EL)

To reset your capacity monitor, replace the battery (purchased separately) in the monitor case, as follows:

#### Monitors with AAA Batteries:

22. Disconnect and remove used batteries.
23. Turn on the faucet and let the water flow for 2 to 3 seconds, then close the faucet.
24. Connect two batteries, making sure to properly connect the + and - terminals.
25. Close the capacity monitor case.

**IMPORTANT:** Make sure the box is positioned so that the receptacles are facing downward. While water is flowing, a green LED light will blink at the base of the faucet. When the capacity of the filter is exhausted, you will see a red blinking light during the water flow alerting you of the need to change your filter.

## XII. Certification



### Multi-Pure Drinking Water Systems Product Performance Tested and Certified

Multi-Pure Drinking Water Systems have been tested and certified by NSF International to comply with NSF/ANSI Standards 42 and 53 for the reduction of specific contaminants being considered as established or potential health hazards.

#### Standard 42, Aesthetic Effects

System tested and certified by NSF International against NSF/ANSI Standard 42 for the reduction of:

- Chloramine
- Chlorine taste and odor
- Nominal Particulate reduction, class I

#### Standard 53, Health Effects

System tested and certified by NSF International against NSF/ANSI Standard 53 for the reduction of:

- |           |                    |
|-----------|--------------------|
| Asbestos  | Chlordane          |
| Cyst      | Lead               |
| Mercury   | MTBE               |
| PCB       | Toxaphene          |
| Turbidity | VOC (listed below) |

#### Volatile Organic Chemicals (VOC) includes:

##### Disinfection By-Products

- chloropicrin
- haloacetonitriles (HAN):
  - bromochloroacetonitrile
  - dibromoacetonitrile
  - dichloroacetonitrile
  - trichloroacetonitrile
- haloketones (HK):
  - 1,1-dichloro-2-Propanone
  - 1,1-trichloro-2-Propanone
- trihalomethanes (THMs; TTHMs):
  - bromodichloromethane
  - bromoform
  - chloroform
  - dibromochloromethane
  - tribromoacetic acid

##### Chemicals

- benzene
- carbon tetrachloride
- chlorobenzene
- 1,2-dichloroethane
- 1,1-dichloroethylene
- cis-1,2-dichloroethylene
- 1,2-dichloropropane
- cis-1,3-dichloropropylene
- ethylbenzene
- hexachlorobutadiene
- hexachlorocyclopentadiene
- simazine
- styrene
- 1,1,2,2-tetrachloroethane
- tetrachloroethylene
- toluene
- trans-1,2-dichloroethylene
- 1,2,4-trichlorobenzene
- 1,1,1-trichloroethane
- 1,1,2-trichloroethane
- trichloroethylene
- xylenes (total)


##### Herbicides

- alachlor
- atrazine
- 2,4-D
- dinoseb
- pentachlorophenol
- 2,4,5-TP (silvex)

##### Pesticides

- carbofuran
- dibromochloropropane (DBCP)
- o-dichlorobenzene
- p-dichlorobenzene
- endrin
- ethylene dibromide (EDB)
- heptachlor
- heptachlor epoxide
- lindane
- methoxychlor

Claims of capacity are not applicable to contaminants reduced by mechanical filtration because of broad variations in the quality and quantity of physical matter in your drinking water..

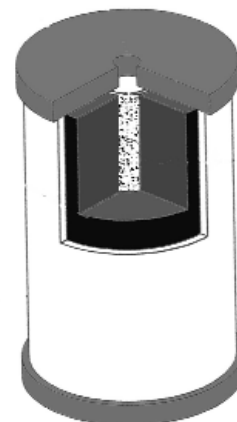

Filter Model CB6

### XIII. Performance Data Sheet



## Performance Data Sheet

Multi-Pure Drinking Water Systems have been tested and certified under NSF/ANSI Standard Nos. 53 as shown below. The concentration of the indicated substances in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in NSF/ANSI 53, Health Effects.



For Model Nos. MP750SB, MP750SC, MP750SSCT, MP750SI, MP1200EL

Substance	Percent Reduction**	Influent challenge concentration (mg/L unless specified)	Maximum permissible product water concentration (mg/L unless specified)
ALACHLOR*	>98%	0.05	0.001
ASBESTOS	>99.9%	10 <sup>7</sup> to 10 <sup>8</sup> fibers/L; fibers greater than 10 micrometers in length	99% reduction requirement
ATRAZINE*	>97%	0.1	0.003
BENZENE*	>99%	0.081	0.001
BROMODICHLOROMETHANE (TTHM)*	>99.8%	0.300 +/- 0.30	0.015
BROMOFORM (TTHM)*	>99.8%	0.300 +/- 0.30	0.015
CARBOFURAN (Furadan)*	>99%	0.19	0.001
CARBON TETRACHLORIDE*	98%	0.078	0.0018
CHLORDANE	>99.5%	0.04 +/-10%	0.002
CHLOROBENZENE (Monochlorobenzene)*	>99%	0.077	0.001
CHLOROPICRIN*	99%	0.015	0.0002
CHLOROFORM (TTHM)* (surrogate chemical)	>99.8%	0.300 +/- 0.30	0.015
Cryptosporidium (CYST)	99.95%	minimum 50,000/mL	99.95%
CYST (Giardia; Cryptosporidium; Entamoeba; Toxoplasma)	99.95%	minimum 50,000/mL	99.95%
2, 4-D*	98%	0.110	0.0017
DBCP (see Dibromochloropropane)*	>99%	0.052	0.00002
1,2-DCA (see 1,2-DICHLOROETHANE)*	95%	0.088	0.0048
1,1-DCE (see 1,1-DICHLOROETHYLENE)*	>99%	0.083	0.001
DIBROMOCHLOROMETHANE (TTHM; Chlorodibromomethane)*	>99.8%	0.300 +/- 0.30	0.015
DIBROMOCHLOROPROPANE (DBCP)*	>99%	0.052	0.00002
o-DICHLOROBENZENE (1,2 Dichlorobenzene)*	>99%	0.08	0.001
p-DICHLOROBENZENE (para-Dichlorobenzene)*	>98%	0.04	0.001
1,2-DICHLOROETHANE (1,2-DCA)*	95%	0.088	0.0048
1,1-DICHLOROETHYLENE (1,1-DCE)*	>99%	0.083	0.001
CIS-1,2-DICHLOROETHYLENE*	>99%	0.17	0.0005
TRANS-1,2- DICHLOROETHYLENE*	>99%	0.086	0.001
1,2-DICHLOROPROPANE (Propylene Dichloride)*	>99%	0.08	0.001
CIS-1,3- DICHLOROPROPYLENE*	>99%	0.079	0.001
DINOSEB*	99%	0.17	0.0002
EDB (see ETHYLENE DIBROMIDE)*	>99%	0.044	0.00002
ENDRIN*	99%	0.053	0.00059
Entamoeba (see CYSTS)	99.95%	minimum 50,000/mL	99.95%
ETHYLBENZENE*	>99%	0.088	0.001
ETHYLENE DIBROMIDE (EDB)*	>99%	0.044	0.00002
Furadan (see CARBOFURAN)*	>99%	0.19	0.001

**\*\*Percent reduction reflects actual performance of Multi-Pure product as specifically tested (at 200% of capacity, i.e. 1500 gallons). Percent reduction shown for VOCs\* reflects the allowable claims for Volatile Organic Chemicals/Compounds as per Tables. Chloroform was used as a surrogate for VOC reduction claims, the Multi-Pure Systems' actual reduction rate of Chloroform was >99.8% as tested (at 200% of capacity).**

### XIII. Performance Data Sheet (continued)

Substance	Percent Reduction**	Influent challenge concentration (mg/L unless specified)	Maximum permissible product water concentration (mg/L unless specified)
Giardia Lamblia (see CYST)	>99.95%	minimum 50,000/mL	99.95%
<b>HALOACETONITRILES (HAN)*</b>			
<b>BROMOCHLOROACETONITRILE</b>	98%	0.022	0.0005
<b>DIBROMOACETONITRILE</b>	98%	0.024	0.0006
<b>DICHLOROACETONITRILE</b>	98%	0.0096	0.0002
<b>TRICHLOROACETONITRILE</b>	98%	0.015	0.0003
<b>HALOKETONES (HK):*</b>			
<b>1,1-DICHLORO-2-PROPANONE</b>	99%	0.0072	0.0001
<b>1,1,1-TRICHLORO-2-PROPANONE</b>	96%	0.0082	0.0003
<b>HEPTACHLOR*</b>	>99%	0.25	0.00001
<b>HEPTACHLOR EPOXIDE*</b>	98%	0.0107	0.0002
<b>HEXACHLOROBUTADIENE (Perchlorobutadiene)*</b>	>98%	0.044	0.001
<b>HEXACHLOROCYCLOPENTADIENE*</b>	>99%	0.060	0.000002
<b>LEAD (pH 6.5)</b>	>99.3%	0.15 +/- 10%	0.010
<b>LEAD (pH 8.5)</b>	>99.3%	0.15 +/- 10%	0.010
<b>LINDANE*</b>	>99%	0.055	0.00001
<b>MERCURY (pH 6.5)</b>	>99%	0.006 +/- 10%	0.002
<b>MERCURY (pH 8.5)</b>	>99%	0.006 +/- 10%	0.002
<b>METHOXYCHLOR*</b>	>99%	0.050	0.0001
Methylbenzene (see TOLUENE)*	>99%	0.078	0.001
Monochlorobenzene (see CHLOROENZENE)*	>99%	0.077	0.001
<b>MTBE (methyl tert-butyl ether)</b>	>96.6%	0.015 +/- 20%	0.005
<b>POLYCHLORINATED BIPHENYLS (PCBs , Aroclor 1260)</b>	>99.9%	0.01 +/- 10%	0.0005
PCE (see TETRACHLOROETHYLENE)*	>99%	0.081	0.001
<b>PENTACHLOROPHENOL*</b>	>99%	0.096	0.001
Perchlorobutadiene (see HEXACHLOROBUTADIENE)*	>98%	0.044	0.001
Propylene Dichloride (see 1,2 -DICHLOROPROPANE)*	>99%	0.080	0.001
<b>SIMAZINE*</b>	>97%	0.120	0.004
Silvex (see 2,4,5-TP)*	99%	0.270	0.0016
<b>STYRENE (Vinylbenzene)*</b>	>99%	0.15	0.0005
1,1,1-TCA (see 1,1,1 - TRICHLOROETHANE)*	95%	0.084	0.0046
TCE (see TRICHLOROETHYLENE)*	>99%	0.180	0.0010
<b>1,1,2,2- TETRACHLOROETHANE*</b>	>99%	0.081	0.001
<b>TETRACHLOROETHYLENE*</b>	>99%	0.081	0.001
<b>TOLUENE (Methylbenzene)*</b>	>99%	0.078	0.001
<b>TOXAPHENE</b>	>92.9%	0.015 +/- 10%	0.003
Toxoplasma (see CYSTS)	99.95%	minimum 50,000/mL	99.95%
<b>2,4,5-TP (Silvex)*</b>	99%	0.270	0.0016
<b>TRIBROMOACETIC ACID*</b>		0.042	0.001
<b>1,2,4 TRICHLOROBENZENE (Unsymtrichlorobenzene)*</b>	>99%	0.160	0.0005
<b>1,1,1-TRICHLOROETHANE (1,1,1-TCA)*</b>	95%	0.084	0.0046
<b>1,1,2-TRICHLOROETHANE*</b>	>99%	0.150	0.0005
<b>TRICHLOROETHYLENE (TCE)*</b>	>99%	0.180	0.0010
<b>TRIHALOMETHANES (TTHM) (Chloroform; Bromoform; Bromodichloromethane; Dibromochloromethane)</b>	>99.8%	0.300 +/- 0.30	0.015
<b>TURBIDITY</b>	>99%	11 +/- 1 NTU	0.5 NTU
TRICHLOROBENZENE)*	>99%	0.160	0.0005
Vinylbenzene (see STYRENE)*	>99%	0.150	0.0005
<b>XYLENES (TOTAL)*</b>	>99%	0.070	0.001

### XIII. Performance Data Sheet (continued)

#### NSF/ANSI 42 - Aesthetic Effects

The System has been tested according to NSF/ANSI Standard 42 for the reduction of the following substances. The concentration of the indicated substances in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system.

Substance	Percent Reduction**	Influent challenge concentration (mg/L unless specified)	Maximum permissible product water concentration (mg/L unless specified)
<b>CHLORAMINE as Aesthetic Effect</b> (As Monochloramine)	>97%	3.0 mg/L +/- 10%	0.5 mg/L
<b>CHLORINE as Aesthetic Effect</b>	99%	2.0 Mg/L +/- 10%	> or = 50%
<b>PARTICULATE</b> , (Nominal Particulate Reduction, Class I, Particles 0.5 TO <1 UM)	Class I > 99%	At Least 10,000 particles/mL	> or = 85%

Note: This addresses the U.S. Environmental Protection Agency (EPA) Primary and Secondary Drinking Water Regulations in effect at its time of publication, they relate to Multi-Pure's performance in conformance to the industry performance criteria. These regulations are continually being updated at the Federal level. Accordingly, this list of MCLs will be reviewed and amended when appropriate. Please see sales brochure for list of product certifications.

#### NOTES:

- Multi-Pure Drinking Water Systems have been certified, as indicated, by NSF International for compliance to NSF/ANSI Standard Nos. 42 & 53.
- The Multi-Pure Drinking Water Systems have been certified by the State of California Department of Public Health for the reduction of specific contaminants listed herein.
- Chloroform was used as a surrogate for claims of reduction of VOCs. Multi-Pure Systems tested at >99.8% actual reduction of Chloroform. Percent reduction shown herein reflects the allowable claims for VOCs as per tables in the Standard.
- Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts.**
- Filter life will vary in proportion to the amount of water used and the level of impurities in the water being processed. For optimum performance, it is essential that the filter be replaced on a regularly scheduled basis as follows: (a) annually; (b) when the unit's rated capacity has been reached; (c) the flow rate diminishes; (d) the filter becomes saturated with bad tastes and odors.
- Model No. MP1200EL includes a capacity monitor that automatically flashes a red light when it is time to replace your filter.
- Multi-Pure Drinking Water System STAINLESS STEEL Housings are warranted for a lifetime (provided that filter has been changed at least once per year). All exterior hoses and attachments to the System are warranted for one year. Please see the Owner's Manual for complete product guarantee and warranty information.
- Please see the Owner's Manual for installation instructions and operating procedures.
- In compliance with New York law, it is recommended that before purchasing a water treatment system, NY residents have their water supply tested to determine their actual water treatment needs. Please compare the capabilities of the Multi-Pure unit with your actual water treatment needs.
- Check for compliance with state and local laws and regulations.
- While testing was performed under standard laboratory conditions, actual performance may vary.



MP750SB / MP1200EL



MP750SB faucet



MP1200EL faucet  
with capacity  
monitor



MP750SI

Operational Specifications	MP750xx	MP1200EL
Approximate Service Capacity (6)	750 gallons	1200 gallons
Replacement Filter Type Model No./ Approx. Cost	CB6/\$60	CB6/\$60
Approximate Flow Rate @ 60 psi	0.75 gpm	0.75 gpm
Maximum Water Pressure	100 psi/7.0 kg/cm <sup>2</sup>	100 psi/7.0 kg/cm <sup>2</sup>
Minimum Water Pressure	30 psi/2.1 kg/cm <sup>2</sup>	30 psi/2.1 kg/cm <sup>2</sup>
Maximum Operating Temperature	100°F/38°C for cold water use only	100°F/38°C for cold water use only
Minimum Operating Temperature	32°F/0°C	32°F/0°C

# California Department of Public Health Certification / Registration

State of California  
Department of Public Health  
Water Treatment Device  
Certificate Number  
97 - 1294

Date Issued: June 23, 2007  
Date Revised: September 4, 2007

Trademark/Model Designation	Replacement Element(s)
MP750SB	CB6
MP750SC	CB6
MP750SCT	CB6
MP750SI	CB6
MPC500B	CB6
MPC500C	CB6
MPC500I	CB6
MP-SSCT	CB6
MPCT	CB6

**Manufacturer:** Multi-Pure Corporation

The water treatment device(s) listed on this certificate have met the testing requirements pursuant to Section 116830 of the Health and Safety Code for the following health related contaminants:

Microbiological Contaminants and Turbidity	Inorganic/Radiological Contaminants
Cysts (protozoan)	Asbestos
Turbidity	Lead
	Mercury
Organic Contaminants	
Chlordane	Simazine
PCBs	Styrene
Toxaphene	1,1,2,2-Tetrachloroethane
MTBE	Tetrachloroethylene
VOCs	Toluene
Alachlor	2,4,5-TP (Silvex)
Atrazine	Tribromoacetic Acid
Benzene	1,2,4-Trichlorobenzene
Carbofuran	1,1,1-Trichloroethane
Carbon Tetrachloride	1,1,2-Trichloroethane
Chlorobenzene	Trichloroethylene
Chloropicrin	Trihalomethanes (THMs)
2,4-D	Bromodichloromethane
DBCP	Bromoform
o-Dichlorobenzene	Chloroform
p-Dichlorobenzene	Chlorodibromomethane
1,2-Dichloroethane	Xylenes
1,1-Dichloroethylene	
cis-1,2-Dichloroethylene	
trans-1,2-Dichloroethylene	
1,2-Dichloropropane	
cis-1,3-Dichloropropylene	
Dinoseb	

**Rated Service Capacity:** 750 gallons

**Rated Service Flow:** 0.75 gpm

Do not use where water is microbiologically unsafe or with water of unknown quality, except that systems claiming cyst reduction may be used on water containing cysts.

State of California  
Department of Public Health  
Water Treatment Device  
Certificate Number  
97 - 1295

Date Issued: June 23, 2007

Trademark/Model Designation	Replacement Element(s)
Multi-Pure MP1200EL	CB6

**Manufacturer:** Multi-Pure Corporation

The water treatment device(s) listed on this certificate have met the testing requirements pursuant to Section 116830 of the Health and Safety Code for the following health related contaminants:

Microbiological Contaminants and Turbidity	Inorganic/Radiological Contaminants
Cysts (protozoan)	Asbestos
Turbidity	Lead
	Mercury
Organic Contaminants	
Chlordane	Simazine
PCBs	Styrene
Toxaphene	1,1,2,2-Tetrachloroethane
MTBE	Tetrachloroethylene
VOCs	Toluene
Alachlor	2,4,5-TP (Silvex)
Atrazine	Tribromoacetic Acid
Benzene	1,2,4-Trichlorobenzene
Carbofuran	1,1,1-Trichloroethane
Carbon Tetrachloride	1,1,2-Trichloroethane
Chlorobenzene	Trichloroethylene
Chloropicrin	Trihalomethanes (THMs)
2,4-D	Bromodichloromethane
DBCP	Bromoform
o-Dichlorobenzene	Chloroform
p-Dichlorobenzene	Chlorodibromomethane
1,2-Dichloroethane	Xylenes
1,1-Dichloroethylene	
cis-1,2-Dichloroethylene	
trans-1,2-Dichloroethylene	
1,2-Dichloropropane	
cis-1,3-Dichloropropylene	
Dinoseb	

**Rated Service Capacity:** 1200 gallons

**Rated Service Flow:** 0.75 gpm

Do not use where water is microbiologically unsafe or with water of unknown quality, except that systems claiming cyst reduction may be used on water containing cysts.

## XV. Troubleshooting

Problem	Cause	Remedy
Taste/Odor (general)	The carbon block filter may become saturated with the taste and odors it adsorbs.	Change the filter
Rotten egg odor	Typically a sign of H <sub>2</sub> S (hydrogen sulfide) gas which can occur at any time.	It is recommended that you keep two filter cartridges on hand. When one becomes saturated with odor, remove it and allow it to dry upside (threaded-hole) down on a paper towel. The sulfur gas will dissipate, allowing the cartridge to be reused. Rotating cartridges in this manner will, in some cases, help extend the life of the filter.
Odor & odd color on cartridge	H <sub>2</sub> S (hydrogen sulfide) caused by iron (orange/brownish), manganese (blackish), and/or decaying organisms (slimy/blotchy colors) can cause rotten egg-type odor.	Change of filter cartridge is the only recommended course of action.
"Milky" color in water	Higher than normal water pressure through the System will create small bubbles. Air bubbles do not effect the performance of the system. Air can be trapped inside the lid of the housing.	For a countertop installation, turn on the water and engage the diverter valve while reducing the water flow slightly. For a below the sink installation, adjust the water pressure at the feedwater adapter below the sink. Turn on the ledge faucet or diverter valve and let water run for 3 to 5 minutes after installation or filter change.
Flow rate is slow	Solids: The filter is designed to become restricted in its flow rate when the filter becomes clogged with particulate and other contaminants. When your water flow rate slows to the point that it is inconvenient to use, it is time to change your filter.	It is recommended that filters be replaced at least every twelve months or when its capacity is reached, whichever comes first. If water pressure is too low, adjust water pressure to 60 psi. If other faucets or sprinklers are on turn off other running water.
Water is black	Carbon dust	Allow water to run through the unit to waste for approximately 20 minutes to flush the filter.

## Maintenance Problems

**Flushing / disinfecting the unit housing:** Multi-Pure recommends that you not allow water to sit in a unit for extended periods of time without it being used. If a unit is left unused for more than 10 days, it may need to be flushed/disinfected before you resume use.

To flush a unit that may be contaminated:

1. Confirm that water is turned off to the unit.
2. Relieve the water pressure (if below sink unit) by opening the unit faucet.
3. Remove and discard the used filter.
4. Clean & rinse out the inside of the housing.
5. Add 5 to 7 drops of bleach, such as Clorox™ or Purex™ (5 ¼% sodium hypochlorite) to the bottom canister.
6. Reconnect the housing top and bottom without the replacement filter.
7. Turn on water and let unit housing fill up with the water/bleach solution.
8. Allow unit to soak for at least 30 minutes.
  - a. Countertop Units: To disinfect the spout, place your finger over the tip of the spout and turn the unit upside down. Repeat this procedure 2 or 3 times during the 30-minute soak period.
  - b. Below Sink Units: To disinfect the faucet spout, remove the spout and place it in a container with one-quart of water and bleach (use 5 drops of bleach) and allow to soak for 30 minutes.
9. After the housing has soaked for 30 minutes, disassemble the top and bottom and pour out the water/bleach solution. Rinse out the inside of the housing.
10. Replace the filter (cartridge) following the instructions with the new filter.
11. Follow the instructions with the replacement filter for reconnecting and flushing your unit.

**Stuck / Sticking Diverter Valve:** Normally caused by a mineral (calcium) buildup around the diverter stem. There are two methods for solving this problem (Vegetable Oil or Vinegar).

**Vegetable Oil** (Using vegetable oil to lubricate the diverter valve does not dissolve the mineral deposits which build up and cause the sticking; thus it will be necessary to repeat this procedure from time to time)

1. Unscrew diverter valve from faucet.
2. Pour a little vegetable oil in the inlet hole.
3. Pull the diverter valve stem in/out several times to lubricate it thoroughly.
4. Replace diverter valve on faucet.

**Vinegar** (Using vinegar to dissolve the mineral deposits may cause discoloration)

1. Unscrew diverter valve from faucet.
2. Soak diverter valve in vinegar for 10 minutes.
3. Rinse and replace diverter valve on faucet.

If these methods don't work, it may be necessary to replace the diverter valve. Please contact Multi-Pure Customer Service at 800-622-9206 for assistance.

**Diverter Stem Stuck** (If diverter stem is not operating properly - sticking)

1. Disconnect diverter valve from faucet.
2. Push pin in -- if you can push the pin easily, there was air in the tubing.
3. Reconnect diverter valve.



## XVI. Questions and Answers

Question	Answer	Comments
Will low pH or acid water affect the Multi-Pure filter?	No.	Mineral components expressed as acidity and alkalinity determine pH. Neutrality is 7; below 7 is acidity; above 7 is alkalinity.
Does deionized water or soft water have any affect on Multi-Pure water?	No.	N/A
Can the Multi-Pure System be connected to an automatic ice-maker?	The below sink models can be connected to both your sink and refrigerator, to any type of water dispenser or ice-maker. You can use the same unit installed under your sink to also filter the water at your refrigerator.	To connect a single Drinking Water System to both your sink and refrigerator, request an "ice-maker tee" on the order form.
Can the Multi-Pure System be used during an emergency or when the water is turned off?	Yes, you can hand pump or siphon water through the Multi-Pure System during an emergency. CAUTION -- the Multi-Pure System is not intended to be used where the water is microbiologically unsafe or with water of unknown quality without adequate disinfection before or after the unit.	If water source is questionably contaminated, it should be disinfected prior to use. Add ¼ tsp of household bleach per gallon of water; the Multi-Pure System will remove this solution from the water. Hand pump kits are available from Multi-Pure.
What causes "white" particles to appear in Multi-Pure water when it is frozen or boiled?	The natural minerals in the Multi-Pure water solidify when the water is frozen, and those minerals appear as white flakes or specks when the ice melts.	Natural minerals are beneficial to good health and their existence in drinking water (in normal quantities) should not cause any alarm. Minerals can be removed by Reverse Osmosis technology, which is also available from Multi-Pure on request.
Why does the Multi-Pure System reduce Volatile Organic Chemicals, but not natural minerals?	Minerals are totally dissolved in solution and do not have an actual physical size; thus, the minerals pass through the filter unchanged.	The materials used in Multi-Pure Drinking Water Systems are specially selected for their ability to react with the chemicals in the water, but not with natural minerals that are beneficial to good health.
Should sediment be removed with a standard filter first?	In areas with excessive sedimentation, prefiltration will help extend the operational efficiency of the Multi-Pure cartridge; however, in most areas this is not necessary.	The Multi-Pure System contains a triple filter. The outside material is a prefilter that helps protect the solid carbon block surface from prematurely clogging with large sediment.
Why is the compressed activated carbon block filtration system more efficient than activated carbon (loose granular) systems?	Multi-Pure's solid carbon block filters are compacted into a dense structure causing every molecule of water to be forced through microscopic pores of carbon, effectively reducing a wide range of contaminants of health concern, as well as adsorbing tastes and odors and removing particulate matter removed by typical activated carbon filters.	The Water Quality Association reports that "an activated carbon filter can reduce organics and solid particles, as well as offensive tastes and odors." Only precoat and solid carbon block filters are engineered to provide 0.5 micron mechanical filtration.
What is the difference between a "water softener" and the Multi-Pure Drinking Water System?	Softeners are not used to treat drinking water; they are used only to change the water hardness. Softeners put sodium into the water in exchange for magnesium or calcium ions. Multi-Pure Drinking Water Systems do not remove dissolved minerals, so, the pH is not changed. Natural minerals most often found in water are considered to be essential to good health.	Soft water is good for bathing and laundering and may extend the life of hot water heaters and boilers. However, soft water should not be used for watering plants or lawns. It is recommended that you bypass a water softener when installing your Multi-Pure Drinking Water System.
Can the Multi-Pure System be used on untreated water?	If water source is questionable, it should be disinfected prior to use. Add ¼ tsp of household bleach per gallon of water; the Multi-Pure System will remove this solution from the water. Consult your nearest public water utility for assistance or guidelines on proper treatment of untreated water.	Multi-Pure Systems are designed to be used on treated water systems; they are not intended to be used where the water is microbiologically unsafe or with water of unknown quality without adequate disinfection before or after the unit. Systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts.

For instructions in Spanish, please turn the manual over.

Be sure to replace your filter at least once a year, or sooner if needed.


<b>Date of Installation:</b> _____ <i>Fecha de Instalación</i>
<b>Unit Model Number:</b> _____ <i>Tipo de Unidad</i>
<b>Filter Type:</b> _____ <i>Tipo de Filtro</i>
<b>Dates of Filter Change / Fechas de Cambio del Filtro</b>
_____
_____
_____
_____
_____
_____

To order a Replacement Filter

Call 1-800-622-9208

or

[www.multipure.com/rf.htm](http://www.multipure.com/rf.htm)



**MULTI-PURE**®

**Multi-Pure Corporation**

The Las Vegas Technology Center  
7251 Cathedral Rock Drive  
Las Vegas, NV 89128  
(800) 622-9206 toll-free  
(702) 360-8880 phone  
(702) 360-8575 fax  
headquarters@multipure.com